

This document provides additional assistance with wiring your Extron IP Link enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific Extron IP Link enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type: Display
Manufacturer: Samsung
Firmware Version: N/A
Model(s): UN40FH6030F, UN40FH6030FXZA, UN46FH6030FXZA, UN55FH6030FXZA,
UN55FH6200FXZA, UN60FH6200, UN60FH6200FXZA

Version History:

Driver Version	Date	IP Link Compiler	GC Version	Notes
4	11/11/2014	1.6.0	3.5.2	Added Model UN40FH6030F.
3	6/2/2014	1.6.0	3.5.2	Added Model UN55FH6200FXZA, UN60FH6200FXZA.
2	1/31/2014	1.6.0	3.5.1	Added model UN60FH6200. Added Menu Navigation.
1	9/25/2013	1.6.0	3.5.1	Initial version.

Driver Notes:

Driver has been optimized for volume.

IP Link® Device Interface Communication Sheet

Control Commands & States:

Aspect Ratio	16:9	Zoom 1	Zoom 2
	Wide Fit	4:3	Screen Fit
Audio Mute	On/Off		
Channel TV (Step)	Up	Down	
Input	TV	AV1	Component 1
	HDMI1	HDMI2	
Menu Navigation	Up	Down	Left
	Right	Menu	Enter
	Exit		
Power Control	On	Off	
Volume (Discrete)	0 to 100 in steps of 1		
Volume (Step)	Up	Down	

Status Available:

N/A

MLC60 Series Supported Commands:

Aspect Ratio	16:9	Zoom 1	Zoom 2
	Wide Fit	4:3	Screen Fit
Audio Mute	On/Off		
Channel TV (Step)	Up	Down	
Input	TV	AV1	Component 1
	HDMI1	HDMI2	
Menu Navigation	Up	Down	Left
	Right	Menu	Enter
	Exit		
Power Control	On	Off	
Volume (Discrete)	0 to 100 in steps of 1		
Volume (Step)	Up	Down	

Cable and Adapter Requirements:

Female DB9 to 3.5 mm stereo connector RS232 serial cable

Notes for the Device:

Serial communication:

Port Type: RS-232

Baud Rate: 9600


Data Bits: 8

Parity: None

Stop Bits: 1

Flow Control: None

Pin Assignments Diagram:

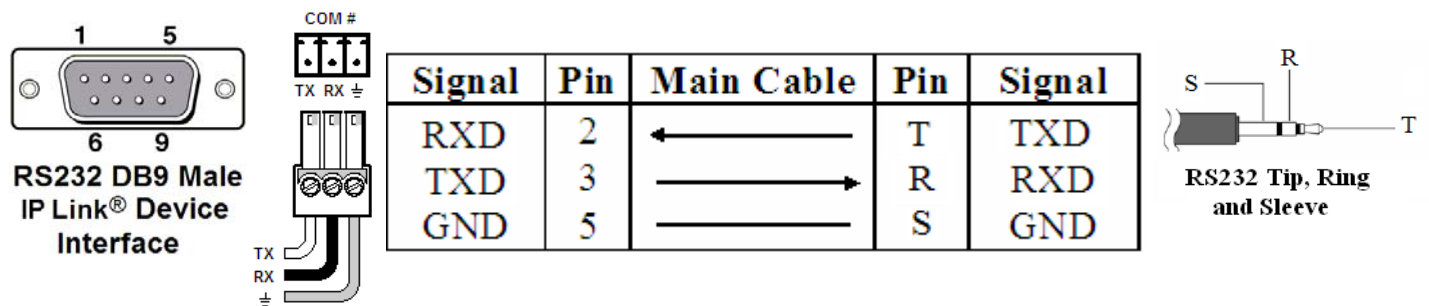

Note: Captive screw connector may also be used as a serial connection.

General Notes: